


ΔP (daPa)

$\rho = 1.2 \text{ kg/m}^3$

ML-400/355 (15")

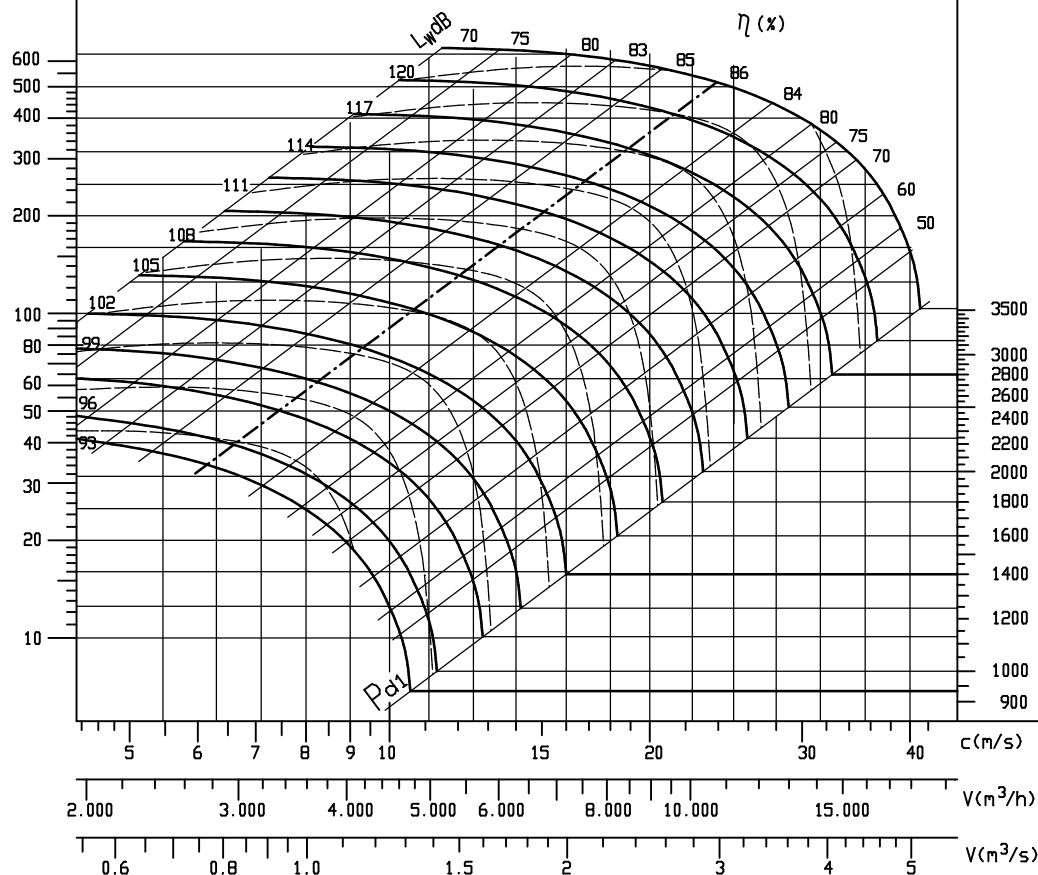





n min ⁻¹	u m/s	P_{max} kW	Motor- leistung
3500	100	20	
3000	90	10	11 kW
2800	80	8	2800 min ⁻¹
2600	70	6	
2400	60	5	
2200	50	4	
2000	40	3	
1800	30	2	
1600	25	1.5	1400 min ⁻¹
1400		1	
1200		0.8	
1000		0.6	
900		0.5	
		0.4	0.37 kW
		0.3	900 min ⁻¹

Schalldruckpegel L_A (dB) = Schall-Leistungspegel L_W (aus Diagramm) minus 19 dB

Mögliche Gehäusestellungen

Ausführung "GR"

Ausführung "GL"
(optional)

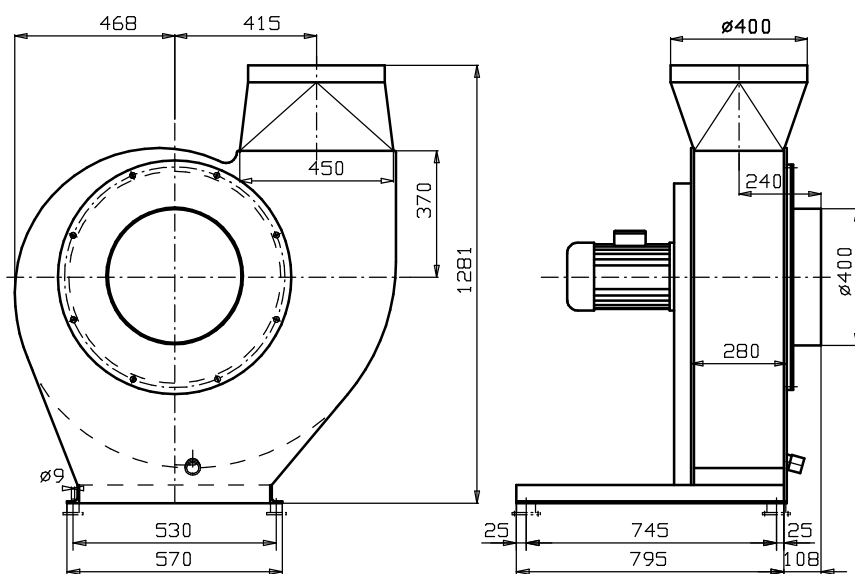

Maßänderungen vorbehalten